

Firmware Update Instructions for:



SoundPro SE/DL Series Meters

Purpose: These instructions are provided to aid in updating the SoundPro® SE/DL Series meters to the latest firmware revision. The supplied application should allow the user to update the device firmware from a PC using any of the following Microsoft® operating systems: Windows 2000 Professional with SP4, Windows XP Professional with SP1 or SP2, or Windows XP Professional 64-bit.

Before you Begin: Please read through this entire instruction page prior to updating.


You will need administrative rights on your computer in order to properly install this application. If your logon account does not have full administrative rights, login with an account that does or contact your IT representative to obtain admin rights.

Important Firewall Information: If you have any software firewalls installed, they will need to be configured to allow the necessary FTP transfers to obtain the

update utility software program and any future firmware updates.

Attention Windows XP users: The add New Hardware wizard will display warning dialog (shown below) stating that the driver is not Windows Logo tested. This is expected and you should click **Continue Anyway** to proceed.

The first time you plug in the SoundPro® SE/DL, Windows XP will install the appropriate drivers but due to a bug in Windows XP it will report that the device was not installed correctly. Interrupt power to the SoundPro® SE/DL by removing and reinstalling one battery cell. Repeat the programming steps in the Update Utility to proceed. This will only be necessary the very first time you attach the device. Hopefully this issue will be resolved in the future Windows XP service pack.

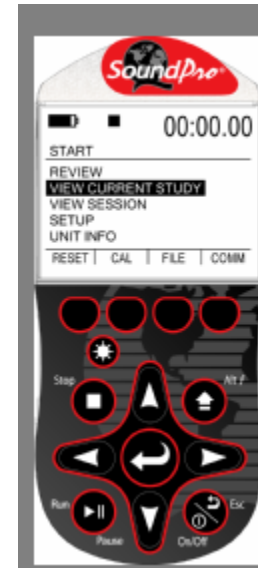

For Technical Support:

Email:
techsupport@quest-technologies.com

Call (inside USA):
800-245-0779

Call (outside of USA):
262-567-9157

Update Instructions

Note: Before beginning, ensure you saved and organized all your studies in QSPII. At the end of these steps, you will reformat your card. (How to download your files in QSPII see: "SoundPro SE/DL Download - Step by Step" in QSPII help files.)

Step 1: Download the file SoundProUpdate.exe from the following link:

- <ftp://ftp.quest-technologies.com/Products/Sound/SoundProSLM/SoundProUpdate.exe>

Step 2: Once you have retrieved the file, execute it by double-clicking on its icon.

Step 3: Click the install button to install the application.

Step 4: Once installation has finished, double-click the SoundProSLM Update icon on your desktop.

Step 5: Click No to skip Windows' updating and use the update bundled with the installer.

Step 6: The update utility will explain how to connect the SoundPro® SE/DL meter to the pc. Connect it at this time.

Step 7: When the update is complete, the application will ask you if you want to update another device. Simply click No and the application will close. Interrupt power from the SoundPro® SE/DL by removing and reinstalling at least one battery cell. Power the meter on and verify the new firmware revision by viewing the Unit Info screen in the meter.

Step 8: Reformat the SD card. (From the main menu, press the **File** softkey. Arrow down and select **Format Card**. Highlight and select **Quick Format**.)

Regarding Future Updates: When new versions of the device firmware become available, this same utility can be used to retrieve the updated firmware if you have an active internet connection. Just start the application and click **Yes** when it prompts you to do so to get the latest version.